


Appendix B


Pin-outs For Various Data Cables

HOST Communication

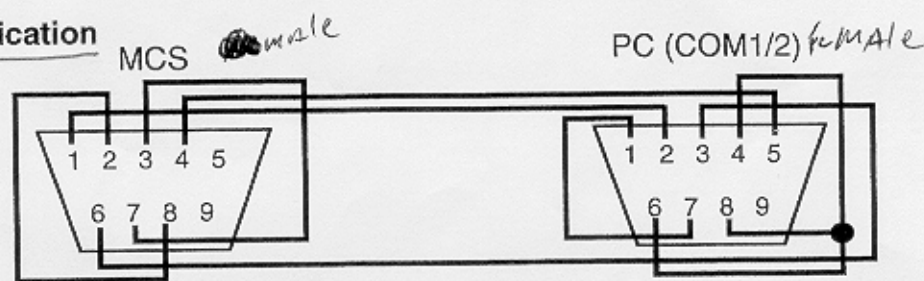


This cable is for downloading data to the MCS (VM1410 PCB) with a PC (AT-style)

Loop Back

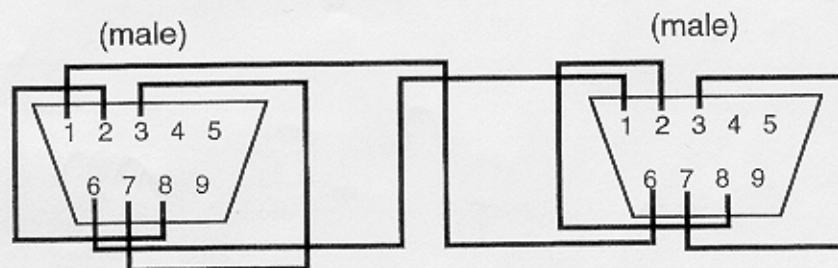


This cable is used for the "Self Test" option on the MCS to check port conditions

Terminal Emulation

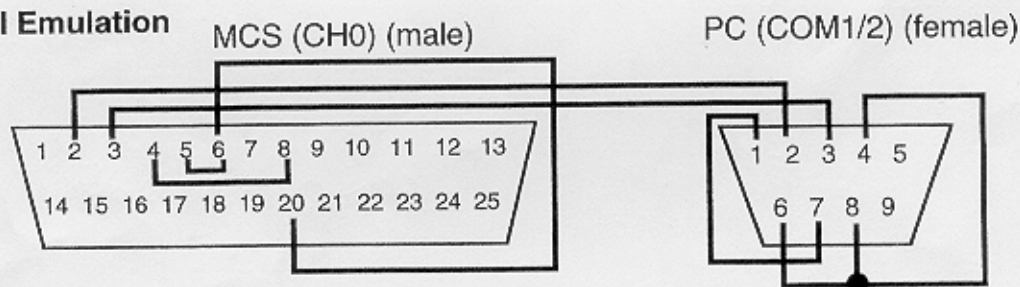

This cable connects the MCS (CH0) to the COM port of a PC (P3 program required)

Machine/MCS

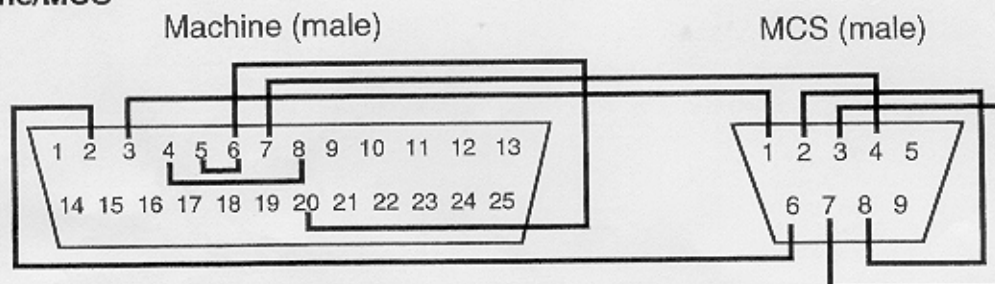

This cable connects the MCS (VM1410 PCB) to the machine

FUJICAM ADAPTER CABLE

9 Pin Female

25 Pin Female

6 _____ 3

1 _____ 2

4 _____ 7

4
5


6
20

WIN NT C/C TO FUJI MACHINE

25 PIN TO 25-PIN

FUJI
MACHINE
25- PIN MALE

WINDOWS NT C/C
(DIGI-BOARD)
25 - PIN FEMALE

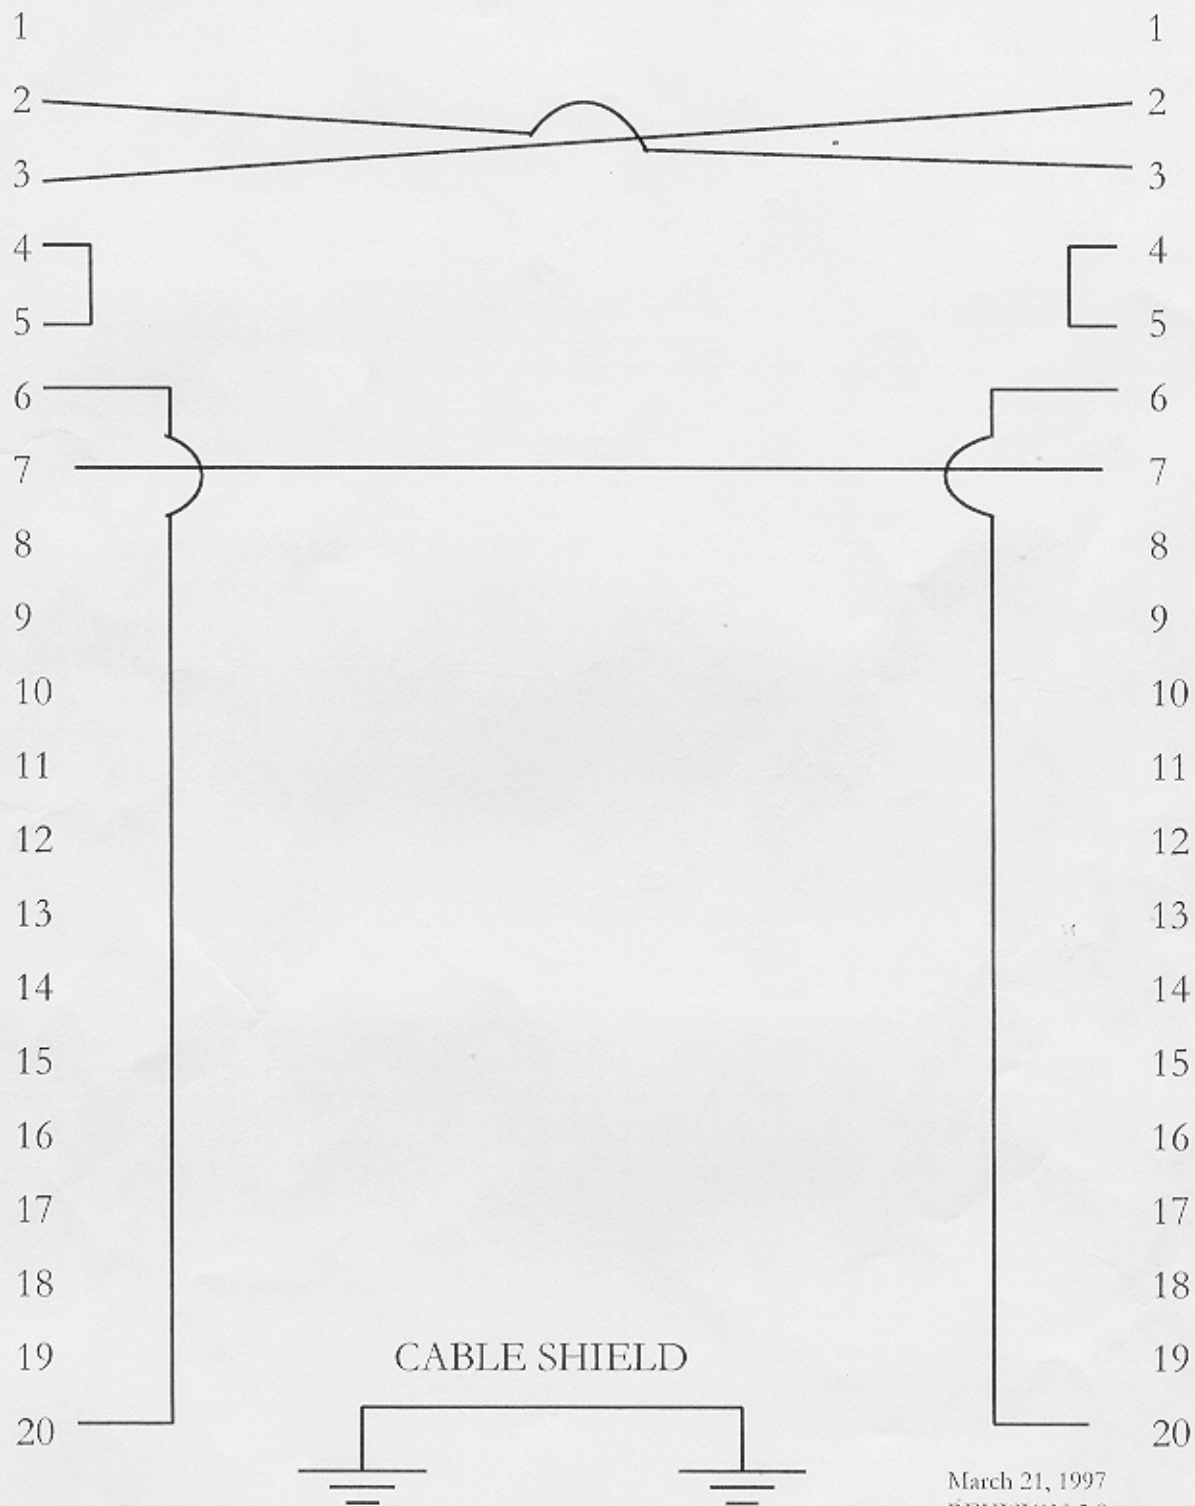

March 21, 1997
REVISION 2.0

WIN-NT C/ C TO FUJI MACHINE

9 PIN TO 25 PIN

